


**Tragkraft kp
abgestützt, 360° drehbar**

Aus- ladung m	Auslegerlänge m				
	8,4	10,5	13,2	18,6	24,0
2					
2,5					
3	30 000	20 000	15 000	10 000	8 000
3,5	30 000	20 000	15 000	10 000	8 000
4	27 000	20 000	15 000	10 000	8 000
4,5	20 000	20 000	14 600	10 000	8 000
5	17 000	17 100	13 600	9 700	8 000
6	13 000	12 100	10 900	8 200	7 200
7		9 100	9 100	7 200	6 200
8			7 000	6 200	5 500
9			5 500	5 500	4 800
10			4 500	4 800	4 300
11				4 000	3 900
12				3 400	3 500
13				2 900	3 100
14				2 500	2 700
15				2 100	2 400
16				1 900	2 100
17					1 800
18					1 600
19					1 450
20					1 300
21					1 150
22					

**Tragkraft kp
frei, nach hinten**

Aus- ladung m	Auslegerlänge m				
	8,4	10,5	13,2	18,6	24,0
2					
2,5					
3	17 400	17 400	15 000		
3,5	13 500	13 500	13 500		
4	11 000	11 000	11 000		
4,5	9 000	9 000	9 000		
5	7 700	7 700	7 700		
6		5 800	5 800		
7		4 500	4 500		
8		3 600	3 600		
9			2 900		
10			2 300		
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					

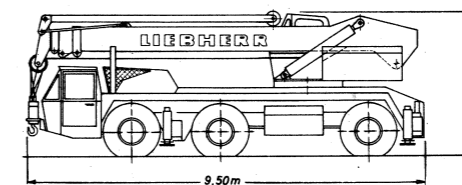

Gesamtbreite: 2,50m
Absatzbreite: 5,20m

12.1970

Änderungen vorbehalten.

Projektblatt
Nr.:
LWE P 1003

Liebherr Autokran 40 T - 60
max. Tragkraft 30 Mp

LIEBHERR-WERK EHINGEN GMBH

